

Features

- Low reverse leakage
- High forward surge capability
- High reliability
- Lead and body according with RoHS standard
- Green compound with suffix "-F" on Marking


ITO-220AB

Mechanical Data

- Case: ITO-220AB Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Pure tin plated, lead free
- Mounting Position: Any
- Mounting torque: Recommend 0.3 N*m

Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.


Parameter	Symbols	MBRF 2040CT	MBRF 2045CT	MBRF 2050CT	MBRF 2060CT	MBRF 2080CT	MBRF 20100CT	MBRF 20150CT	MBRF 20200CT	Unit							
Maximum repetitive peak reverse voltage	V _{RRM}	40	45	50	60	80	100	150	200	V							
Maximum RMS voltage	V _{RMS}	28	31.5	35	42	56	70	105	140	V							
Maximum DC blocking voltage	V _{DC}	40	45	50	60	80	100	150	200	V							
Maximum average forward rectified current	I _{F(AV)}	20.0								A							
Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I _{FSM}	150								A							
@IF=5.0A Maximum forward voltage	V _F	0.70		0.80		0.85		0.95	0.99	V							
@V _{DC} TA= 25°C	I _R	100			50			uA									
Maximum reverse current TA=100°C		20			10			mA									
Typical thermal resistance (Note 1)	R _{θJC}	4								°C/W							
VR=4.0V,f=1MHz Type junction capacitance	C _j	310								pF							
Operating junction and storage temperature rang	T _j , T _{TSG}	-55 --- +150								°C							

Note:


1) Thermal resistance from junction to case , PCB mounted.

Characteristic Curves

TYPICAL FORWARD CHARACTERISTIC

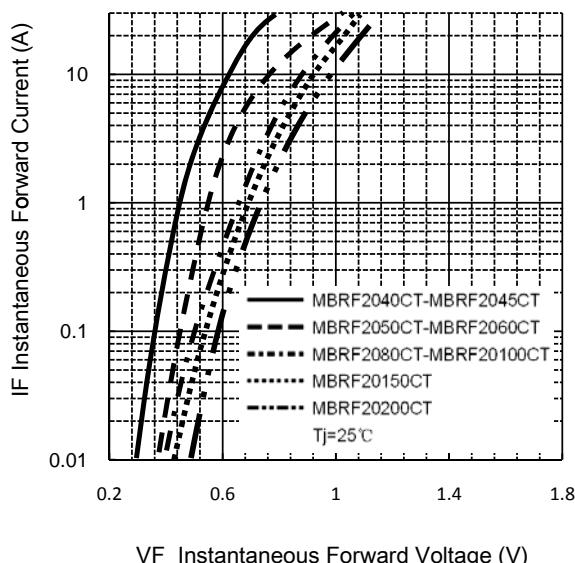

FORWARD CURRENT DERATING CURVE

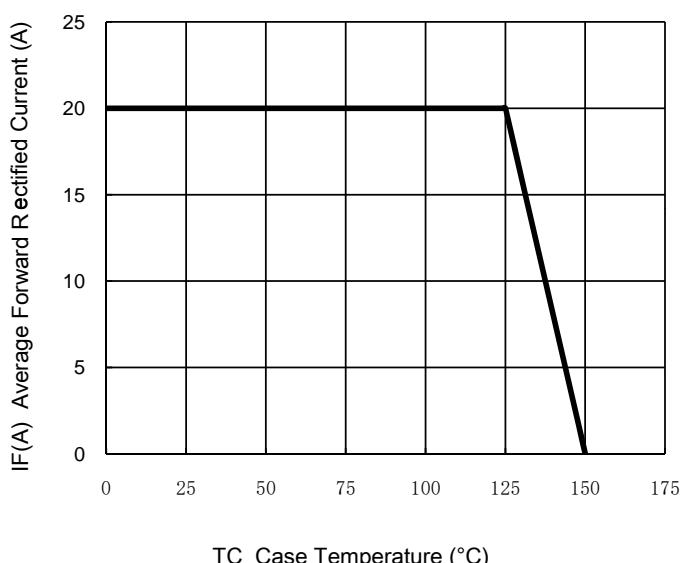


VF Instantaneous Forward Voltage (V)

TC Case Temperature ($^\circ\text{C}$)


MAXIMUM NON REPETITIVE

PEAK FORWARD SURGE CURRENT

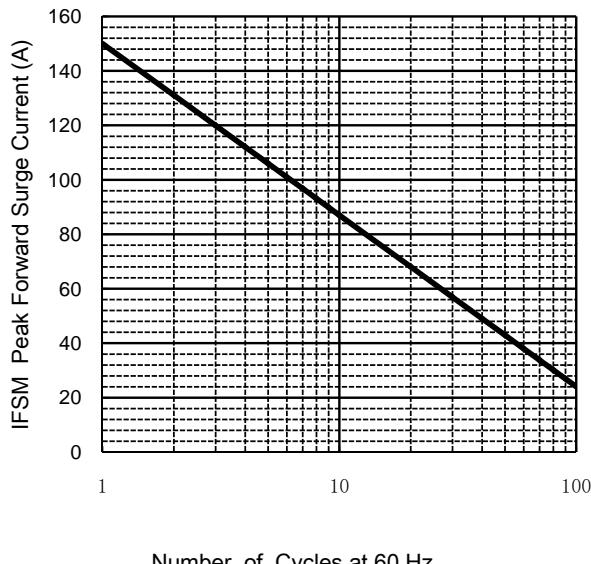


Number of Cycles at 60 Hz.

Typical Reverse Characteristics

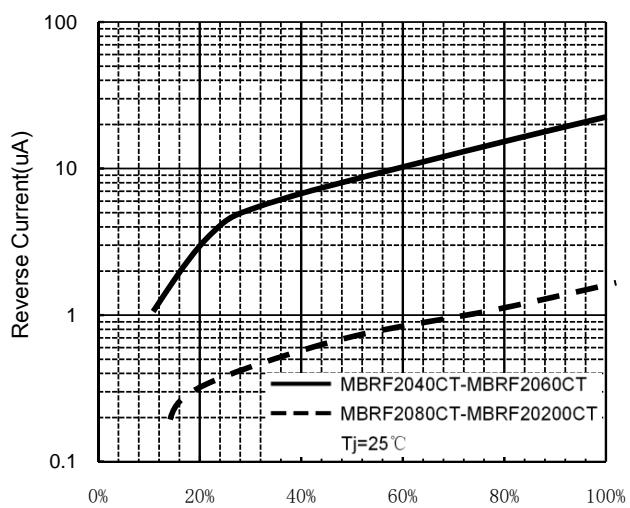

Percent Of Rated Peak Reverse voltage %

Package Outline

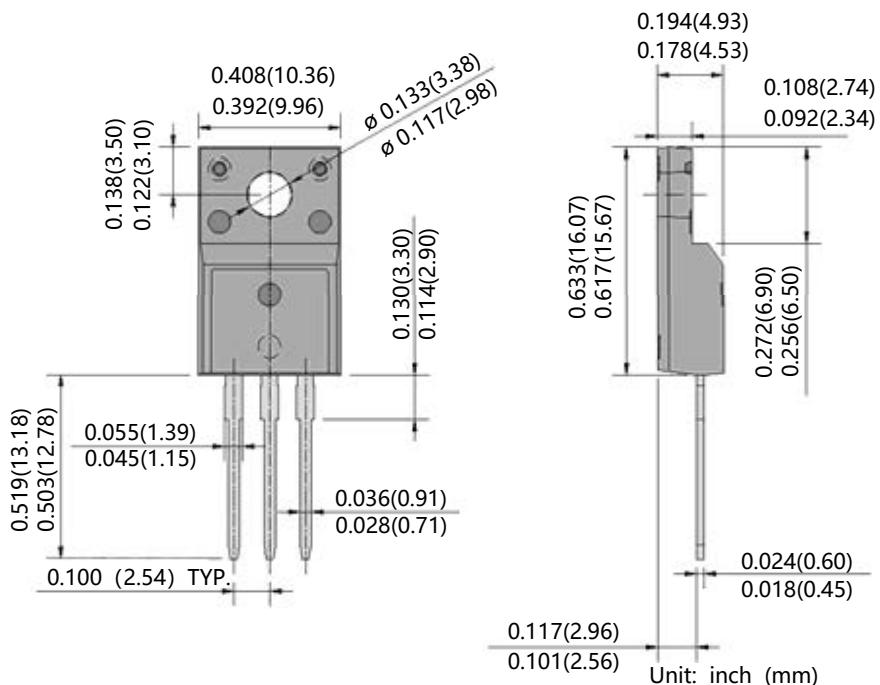

Package Information

Qty: 1,000 /Tape and reel