



Description

- Proprietary processing technique produces extremely low resistance values
- Very low inductance
- Low thermal EMF
- Metallic Material



Part Numbering System

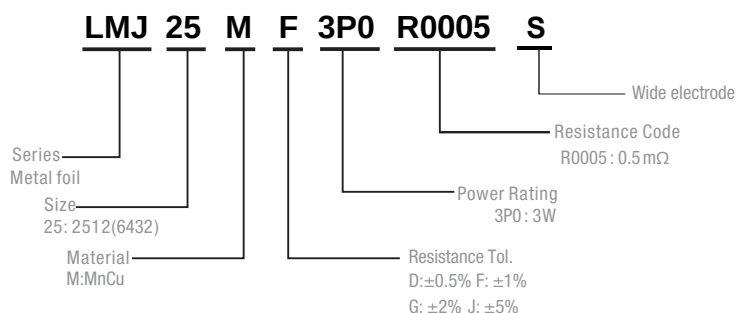


Parameter	Standard
Power Rating	2&3W
Resistance Value	0.5mΩ
Operating Temperature Range	-55 to +170°C
Component Temperature Coefficient (TCR)	100 ppm/°C
Maximum Working Voltage (V)	$(P \times R)^{1/2}$

Standard Electrical Specifications

Type	Rating Power at 70°C	T.C.R. (ppm/°C)	Resistance Range(mΩ) ±0.5% (D) ±1.0% (F) ±2.0% (G) ±5.0% (J)	Material	Electrode	Operating Temperature(°C)
LMJ25	2&3W	100	0.5	MnCu	Wide	-55~+170°C


Construction

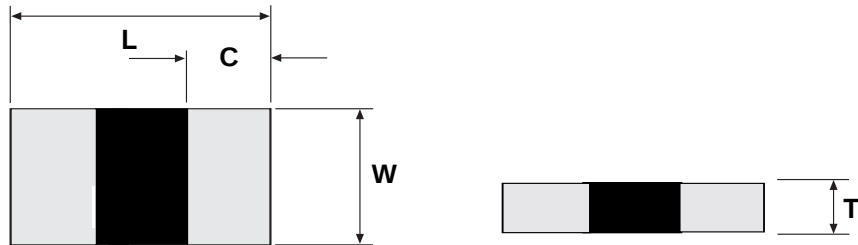

Unit: Millimeters

Style	Resistance (mΩ)	L	W	C	T	Material
LMJ25	0.5	6.4±0.2	3.2±0.2	2.5±0.2	0.9 ±0.20	MnCu

Recommended land pattern

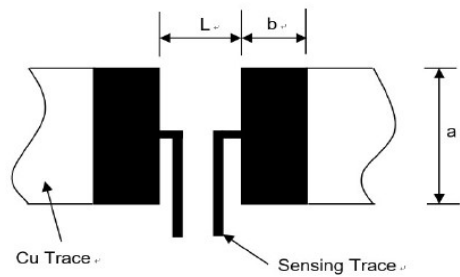


Unit: Millimeters


Resistance Range (mΩ)	a	b	L
0.5	4.0±0.1	3.1±0.1	1.3±0.1

Power Derating Curve

For resistors operated in ambient temperatures 70°C, power rating shall be derated in according with the curve below:

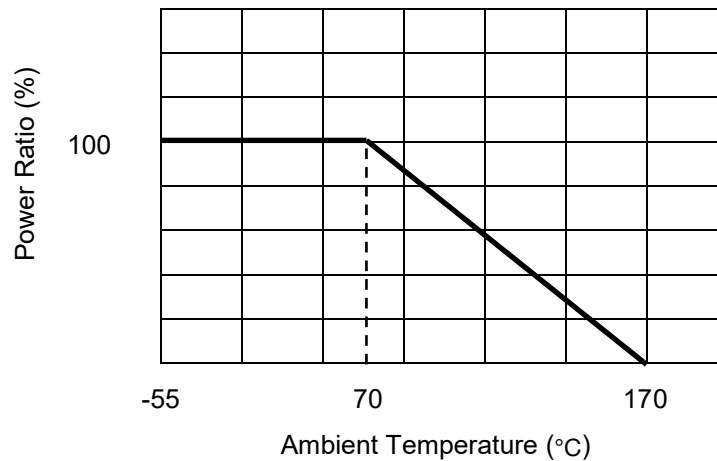

Recommended Solder Curve

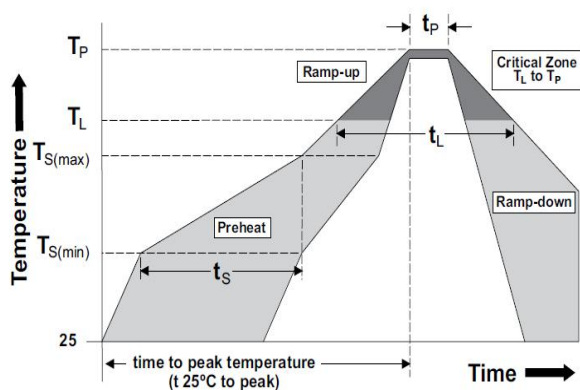


Reflow Condition		Pb – Free assembly
Pre heat	- Temperature Min ($T_{S(min)}$)	150°C
	- Temperature Max ($T_{S(max)}$)	200°C
	- Time (Min to Max) (t_s)	60 – 120 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		5°C/second max
TS(max) to TL - Ramp-up Rate		5°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_P)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max.
Wave Soldering		260°C, 10 seconds max.
Hand Soldering		350°C, 5 seconds max.

Product Characteristics


Item	Test condition/ Methods	Limited	Standard
Resistance	Measuring resistance value at room temperature 25°C±5°C	Refer to Spec	IEC60115-1 4.5
Temperature coefficient of resistance	$TCR = (R - R_0) / R_0 (T_2 - T_1) \times 10^6$ R ₀ : resistance of room temperature R: resistance of 125°C T ₁ : Room temperature T ₂ : Temperature at 125°C	Refer to Spec	MIL-STD-202 Method 304
Short time Overload	Apply overload for 5 seconds and measure the resistance change rate after standing for 24 hours. 5 times the rated power for 5 seconds	≤±0.5%	JIS-C5201-1 4.13
Resistance to Soldering Heat	260°C± 5°C time: 10sec± 1sec	≤±0.5%	MIL-STD-202 Method 210
Temperature Cycling	-55°C (15min)/+150°C(15min), 1000 cycles	≤±0.5%	JESD22 Method JA-104
Low temperature Storage	-55±2°C for 96hours, No power	≤±0.5%	IEC 60115-1 4.23.4
High Temperature Storage	170°C for 1000hours, No power	≤±1%	MIL-STD-202 Method 108
Bias Humidity	+85°C, 85% RH, 10%bias, 1000hours	≤±0.5%	MIL-STD-202 Method103
Solderability	245±5°C, 3±1sec	The area of the electrode covered with fresh tin shall be greater than 95 %.	JSTD-002
Operational life	70°C± 2°C, 1000 hours, at rated power 1.5 hours "ON", 0.5 hours "OFF"	≤±1%	MIL-STD-202 Method 108
Terminal bending	Solder the component onto a flex test board, mount the board on a flex testing machine, apply downward force at the center of the test board to achieve a 2 mm deflection, maintain the load for 60 seconds, and then measure the resistance change rate.	≤±0.5%	JIS-C5201-1 4.33

Tapping & Package

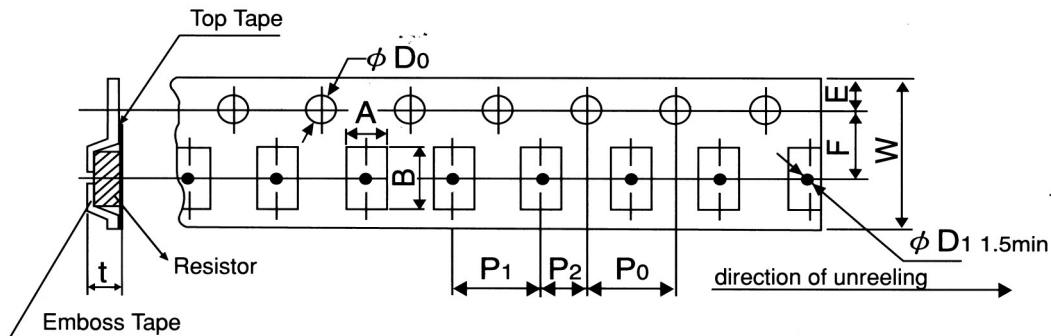

Type	Pack	A ± 0.2	B ± 0.2	D0 $+0.5-0$	E ± 0.1	F ± 0.05	P0 ± 0.1	P1 ± 0.1	P2 ± 0.1	W ± 0.2	D1 ± 0.05	T ± 0.15
2512	Emboss	3.60	6.90	1.50	1.75	5.50	4.00	4.00	2.00	12.00	1.50	1.20

Reel Specification

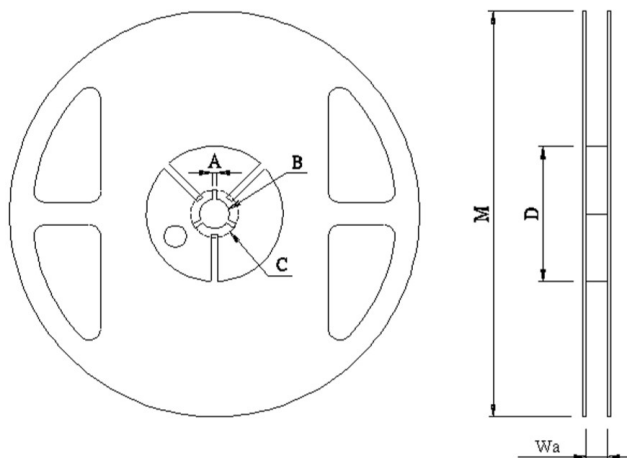

Unit: Millimeters

Type	A	B	C	D	M	W
2512	2.00 ± 0.5	13.50 ± 0.5	21.00 ± 0.5	80.00 ± 1.0	178.00 ± 2.0	13.80 ± 0.5

Packaging

Quantity: 4, 000pcs


8mm wide tape on 178mm(7 inch)

diameter reel -specification EIA

Standard 481.

Peel strength of upper belt

Stripping speed: 300 mm / min; The peel force is between 0.1N and 0.7n.

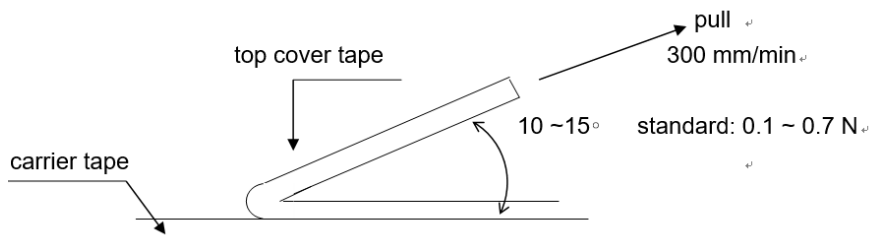

Storage conditions & shelf life

It can be stored for 2 years under closed conditions with temperature of 5 ° C ~ 35 ° C and relative humidity of 40 ~ 75

Please avoid the following harsh environment during storage to avoid affecting the product performance and solder connectivity: the places with corrosive gases such as sea breeze, Cl₂, H₂S, NH₃, SO₂ and NO₂ shall be stored without direct sunlight.

Precautions for product use

When measuring the resistance value before welding, a special resistance meter with high precision shall be used. When measuring, a 4-wire probe or fixture must be used. 4. When measuring parts with a wire measuring needle, the 4 measuring needles must indeed contact the parts.

Avoid damaging the protective layer during manual welding or clamping with tweezers.

When the PCB is divided or fixed on the support, be careful to avoid excessive bending causing mechanical stress to the resistor.

It shall be used within the rated power range within the specification, especially when the power exceeds the rated value, which may affect the reliability of the product